



Half-cell Mono PERC GHM-120 Series





High Efficiency Monocrystalline Half-cut Cell Solar
Module with Perc Technology


320-340W


 **Higher Module Efficiency**
Brings 5-10W power gain due to half-cut production system

 **More Energy Yield**
Lower NMOT and better temperature coefficient by lower cell series resistance, helps boost energy yield


 **Lower Operating Temperature, More Reliable**
Lower operating temperature and hot spot temperature during the sunny day, making the module prevail during the sunny days

 **Better Shading Tolerance**
Thanks to Paralleling circuit design, more power generated under shading condition and during morning & evening time

 **Better Micro Crack Resistance**
Minimize the impact by micro crack by limiting cell damage and potentially extending area by half-cut module architecture

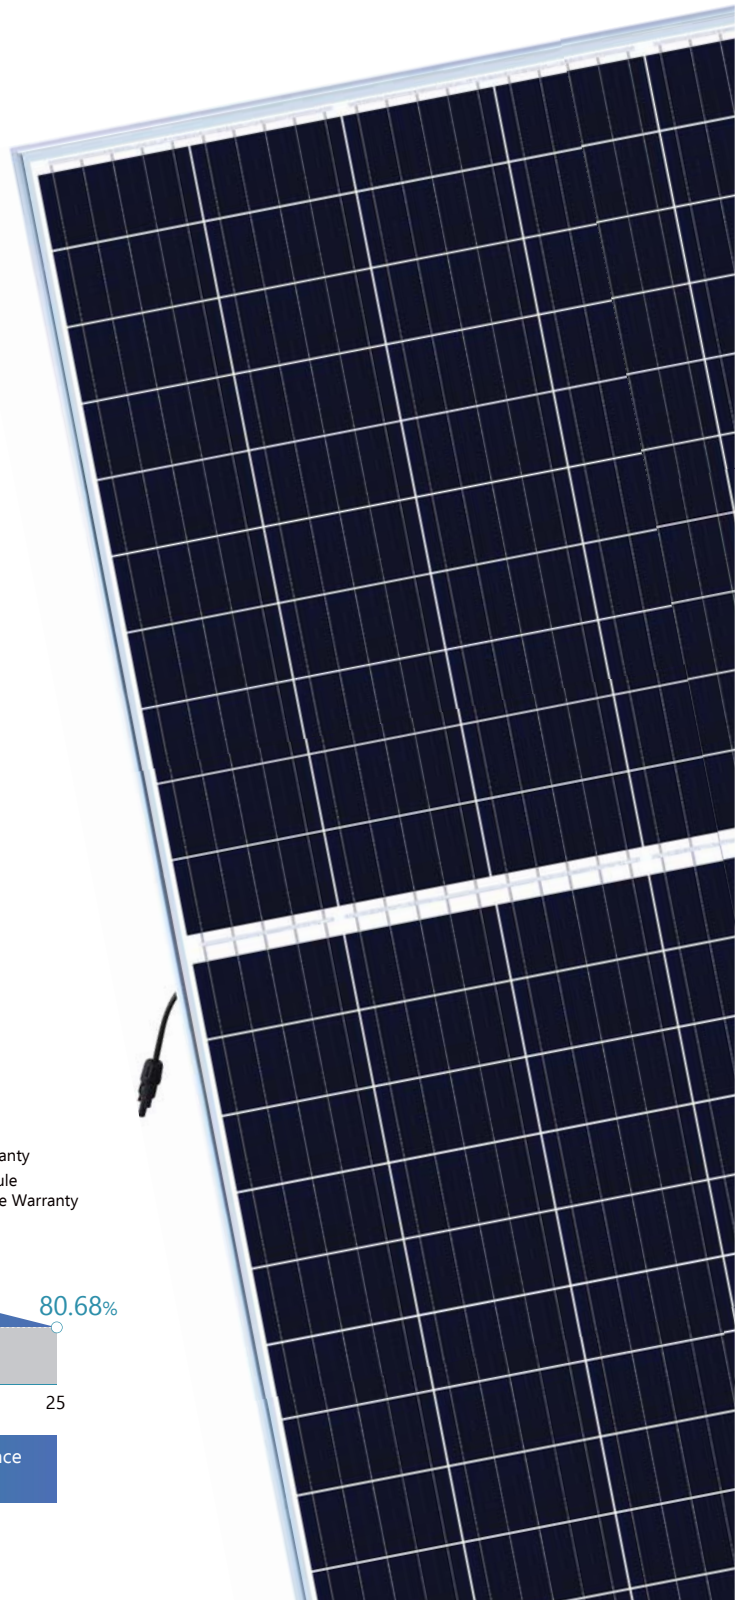

LINEAR PERFORMANCE WARRANTY

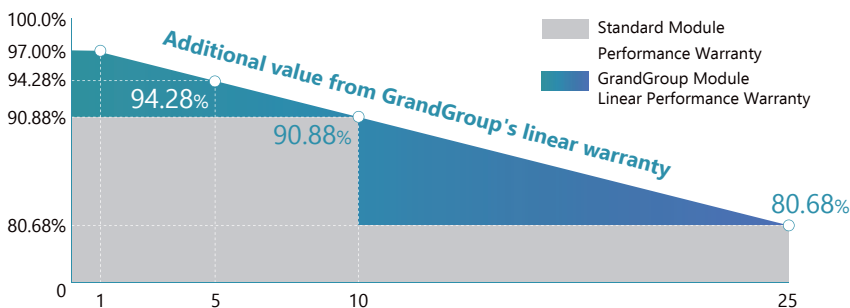


10years Product Material & Workmanship

25years Linear Performance Warranty

ELECTRICAL DATA @ STC*		GHM320-120L	GHM325-120L	GHM330-120L	GHM335-120L	GHM340-120L
Peak Power (Pmax)	(W)	320	325	330	335	340
Maximum Power Voltage (Vmp)	(V)	34.08	34.36	34.63	34.90	35.17
Maximum Power Current (Imp)	(A)	9.39	9.46	9.53	9.60	9.67
Open-circuit Voltage (Voc)	(V)	41.00	41.26	41.53	41.78	42.01
Short-circuit Current (Isc)	(A)	9.91	9.99	10.08	10.16	10.24
Module Efficiency	(%)	18.98	19.28	19.57	19.87	20.17
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		1000V				
Maximum Series Fuse Rating		20A				
Fire Class		Class C				
Power Sorting		0~+4.99W				

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5

Current-Voltage Curve under different irradiance

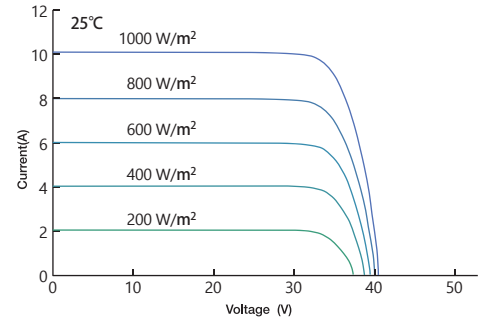


ELECTRICAL DATA @ NMOT*

Peak Power (Pmax)	(W)	237	242	246	250	253
MPP Voltage (Vmp)	(V)	31.38	31.99	32.24	32.49	32.74
MPP Current (Imp)	(A)	7.56	7.58	7.63	7.69	7.74
Open Circuit Voltage (Voc)	(V)	38.67	39.09	39.34	39.58	39.80
Short Circuit Current (Isc)	(A)	8.00	8.06	8.13	8.20	8.26

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

Current-Voltage Curve under different working temperatures

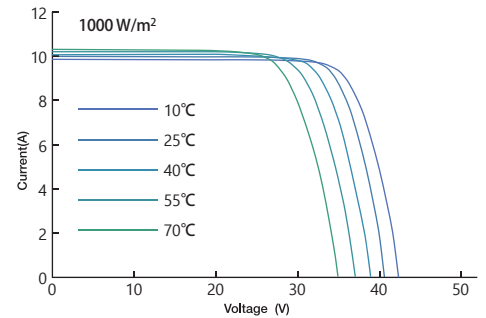

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax		-0.38%/°C
Temperature coefficient of Voc		-0.31%/°C
Temperature coefficient of Isc		0.05%/°C
NMOT		41±3°C

MECHANICAL DATA

Cell Type		Mono-Crystalline, 158.75×79.38mm
Cell Arrangement		120pcs (2×(6×10))
Dimension (L×W×H)		1684×1002×35mm
Weight		19.5kg
Front Cover		3.2mm Tempered Glass
Frame		Anodized Aluminium Alloy
Junction Box		IP68, 3 Bypass Diodes
Cable Type		4mm ²
Length of Cable		1160mm
Connector		PV Connector: Renhe 05-6

PACKING MANNER

Packing Type		40HQ
Piece/Pallet		30
Pallet/Container		26
Piece/Container		780



*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Grand Group Australia PTY LTD. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

*Power measurement tolerance: ±3%

*Voc measurement tolerance: ±3%

*Isc measurement tolerance: ±3%

*All the modules are produced in China and shipped to Australia

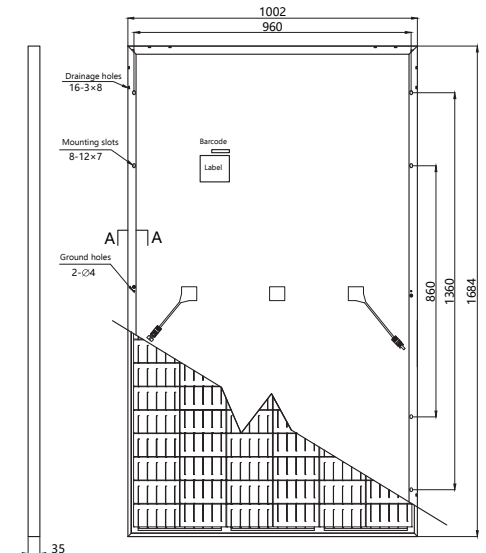

Section A-A

Dimension (unit: mm)